


RODEO 110

QUICK START GUIDE **V1.0**

6th-DEC-2016

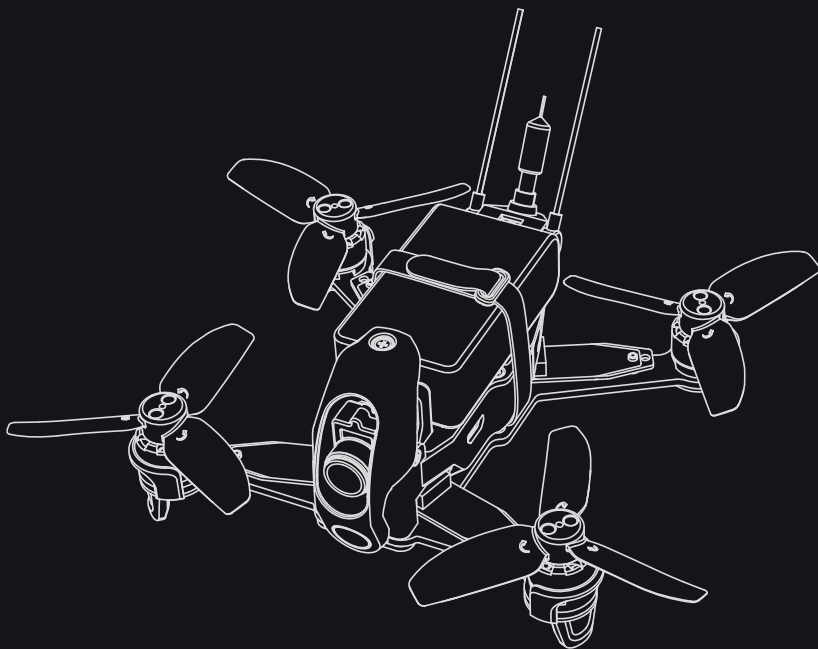

Contents

1.0 Get to know your aircraft	3
2.0 Get to know your Remote Controller	4
3.0 Specifications	5
4.0 Attention before flight	6
5.0 Charge the Battery	6
6.0 Prepare the aircraft	6
7.0 Prepare the Remote Controller	7
8.0 Ready to fly	7
8.1 Binding of the Rodeo 110	7
8.2 Motor Unlock / Lock	8
9.0 Operation Instruction	9-10
10.0 End flight	10
11.0 Additional remark	11
11.1 DEVO 7 Remote Controller Setting	11-12
11.2 TX5836/TX5837 Video transmitting channel selection	13
11.3 Brushless ESC and Brushless Motor connection diagram	13
12.0 In the Box / List of Articles	14

1.0 Get to know your aircraft


- The Rodeo 110 body is created using CFP for outstanding crash survivability.
- Modern industrial and modular design, improves the product performance and permit easy maintenance and upgrades.
- Advanced 5.8ghz live video, for a unforgettable visual FPV experience.
- The Rodeo 110 employ a modern flight control system for acrobatic flight routines such as roll, flip and race courstte moves.

1. Camera
2. Lighting Lamp
3. Upgrade port
4. Receiving red indicator
5. Status red indicator

6. Propeller(CW)
7. Propeller(CCW)
8. Motor x4
9. Li-Po Battery
10. Power port
11. 5.8G transmitter antenna
12. DUAL reciever antennas

for best performance
* always extend before flying

13. Fixed ID clearance button
 14. Power red indicator
 15. External receiver port
 16. PPM and SBUS receiver switch
- Factory default --PPM Port
External receiver --SBUS Port

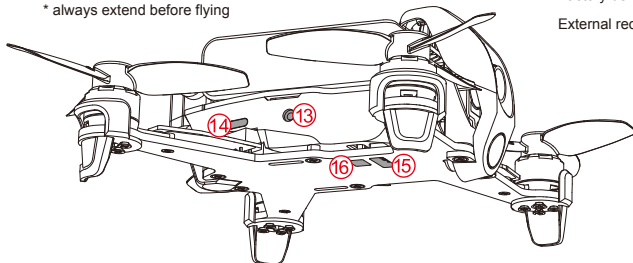




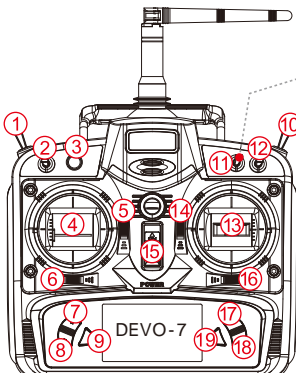
* To avoid property loss and personal injury caused by wrong operation, please read the manual carefully and watch the tutorial videos at www.walkera.com before flight.

2.0 Get to know your Remote Controller

The Rodeo 110 features 3 useful flight modes, STABILIZE / INTERMEDIATE / ADVANCED Flight modes are selected by the MIX switch. (Select the appropriate mode according to your flight skills.)


- ※ STABILIZE Flight mode: the main flight controller system comes with stabilization function, its operation is relatively stable, it can not roll, it is suitable for beginners.
- ※ INTERMEDIATE flight mode: the main flight controller system comes with partial stabilization function, its operation is relatively flexible, it can roll.
- ※ ADVANCED Flight Mode: the main flight controller system without stabilization function, its operation is very flexible, it can roll.

STABILIZE Flight Mode	INTERMEDIATE Flight Mode	ADVANCED Flight Mode
		
MIX Switch to "0"	MIX Switch to "1"	MIX Switch to "2"



- 1. HOLD TRN switch
- 11. MIX - Flight Mode Switch
- 2. GEAR switch
- 12. ELEV/AILE/RUDD D/R Switch
- 3. AUX2 control
- 13. Right stick
- 4. Left stick
- 14. Right trim
- 5. Left trim
- 15. Power switch
- 6. RUDD trim
- 16. AILE trim
- 7. UP+ key
- 17. R+ key
- 8. DN- key
- 18. L- key
- 9. EXT key
- 19. ENT key
- 10. FMD Switch

Take the "MODE 2" as an example. The left stick controls the aircraft's altitude and heading, while the right stick controls its forward, backward, left and right movements.


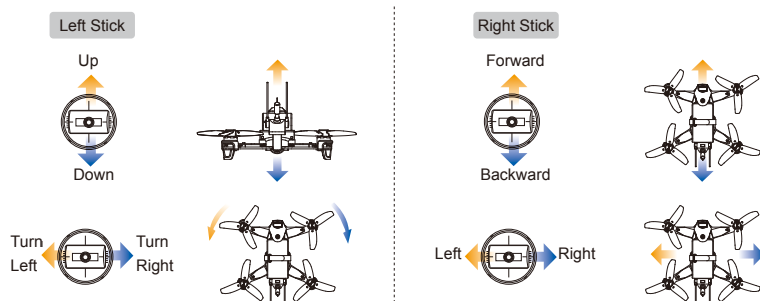


- * 1) MODE 2 (Throttle stick on the left): Left stick- THRO / RUDD; Right stick - ELEV / AILE.
- 2) MODE 1 (Throttle stick on the right): Left stick- ELEV / RUDD; Right stick - THRO / AILE.

3.0 Specifications

• Aircraft

Main Rotor Dia.:	70mm
Overall (L x W x H):	101 x 117 x 55mm
Weight:	101g (Battery excluded)
Remote Controller:	DEVO 7
Receiver/Main Controller:	Rodeo 110
Transmitter:	TX5836(FCC)/TX5837(CE)
Brushless Motor:	WK-WS-13-002
Brushless ESC:	Rodeo 110
Battery:	7.4V 850mAh 25C 2S Li-Po
Flight Time:	7~8mins
Working Temperature:	-10 C ~ +40 C

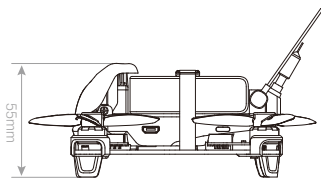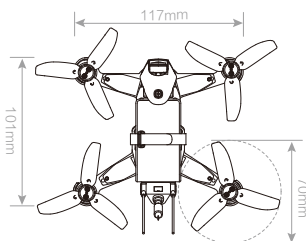

• Camera(600TVL)

Horizontal Resolution:	600TVL
System Committee:	PAL/NTSC
Video Out:	1.0Vp-p/75Ω
Power Input:	DC 5-12V

• DEVO 7 remote controller

Frequency:	2.4GHz DSSS
Output Power:	≤100mW
Current drain:	≤230mA(100mW)
Power Supply:	5# Battery 8x1.5V or NiMH 8x1.2V 1600-2000mAh
Output Pulse:	1000-2000mS(1500Ms Neutral)

• TX5836(FCC) / TX5837(CE) transmitter


5.8G wireless image transmission
TX5836(FCC) Bind B section: 8 channels
TX5837(CE) B section: 8 channels
TX5836(FCC) output power ≤200mW
TX5837(CE) output power ≤25mW

4.0 Attention before flight

- 1) The Rodeo 110 mini-quad is recommended for pilots, 14 years or older, with RC hobby experience.
- 2) Only fly the Rodeo 110 in dry weather, with low wind, please do not fly in rain or heavy foggy conditions.
- 3) Always choose large open fields for flying. Check local LAW and ordinances for legal flying areas.
- 4) Always keep at least 10 feet distance to the aircraft when armed, to avoid injury from high-speed propellers on the ground or while flying. Always disarm before handling the aircraft.
- 5) Do not fly close to high-voltage power lines, cellphone towers, or radio towers, as these may disrupt your control signal.
- 6) ALWAYS check local laws BEFORE flying. NEVER fly over crowds, concerts or sports stadiums.

5.0 Charge the Battery


- ① Connect the charger to the AC power (100 ~ 240v 50/60hz).
- ② Charging indicator status:
Stable red--charging;
Stable green--finished charge.

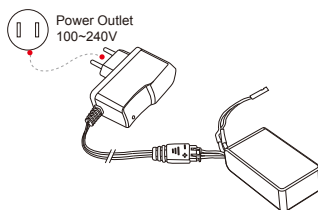

6.0 Prepare the aircraft

Battery installation

First put the battery anti-slip mat into the battery compartment. Put the battery on top and move it forward-backwards as required for perfect balance, then firmly secure the battery with the velcro strap.

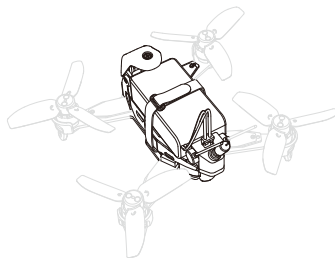


Gravity center adjustment

Grab the Rodeo 110 mini-quad by the COG line (center of gravity).

See the illustration for the COG.


Adjust the battery forward-backwards until the quad balances.

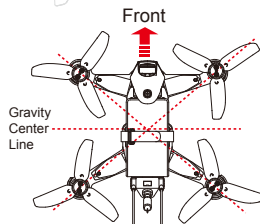

7.0 Prepare the Remote Controller

Open the battery cover and remove the battery box. According to the battery positive and negative polarity, install 8pcs 5# batteries or 8pcs NiMH batteries with same volume.

Warning: Battery polarities must be correctly installed. When insert the plug of battery box into power socket of remote controller, the fool-proofing port must be inserted into fool-proofing port.



8.0 Ready to fly






Attention:

- Place the aircraft in a wide open space, with the rear facing you. (This position is known as "TAIL IN")
- Put all the function switches to the 0 position, put all trims and dials to the Middle position, move the throttle to the lowest position, then turn on the Remote Controller.
- A video receiving equipment is needed (Goggles glasses, etc.) to display an image. (Setting method please refer to P13)
- The Rodeo 110 mini-quad have a low-voltage alarm beeper.
When voltage reach below 7.0 volts the Power red LED light will flash quickly and the beeper will sound alarm.
WARNING: Do not hesitate to land when you hear the alarm.

8.1 Binding of the Rodeo 110

- ① Turn on the Remote Controller.
- ② Connect the aircraft power, then put the aircraft on a horizontal position place, the buzzer will send out the voice of "BB". (make sure the positive and negtive connected correctly)
- ③ In the process of binding, the status red LED light indicates slowly to run out means binding finished successfully. If your aircraft is keeping making a BB sound, it means binding failed.



Tips:

- Do not move the Rodeo 110 during binding.
- ALWAYS unfold the two receiver antennas to their correct STRAIGHT UP position before flying. Do not fly without properly unfolding the antennas.

8.2 Motor Unlock / Lock

Motor Unlock


After binding the DEVO 7 to the Rodeo 110, Check that all trims are neutral, the throttle stick is ALL the way Down with the display indicating 0% throttle. Check that ALL switches are in the UP position.

Gently push the throttle stick down and move the rudder (YAW) stick to the left side and hold for more than 2 seconds. (on mode 2 radios throttle and rudder is the same stick).

You will see the status red LED light keeps on and buzzer issues a "B B" sound, indicating that motors are unlocked.

Be very careful at this point, as pushing the thottle up will start the motors.

You can test by pushing the stick up a little, the motors should start.

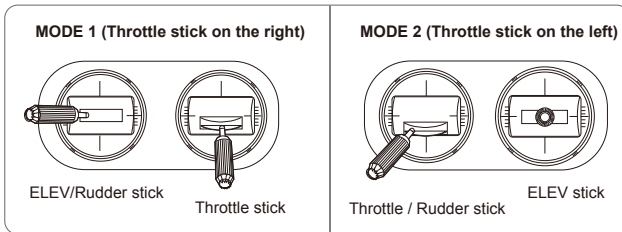


Motor Lock

Lock the motors by moving the throttle stick all the way down and the rudder (YAW) stick all the way to the right.

The status red LED light turns off and buzzer issues a "B B" sound when the motors are disarmed.


TEST: Push the throttle stick up a little, the motors will not start when locked.

NOTICE: The motors are **LOCKED** by default after successful binding.

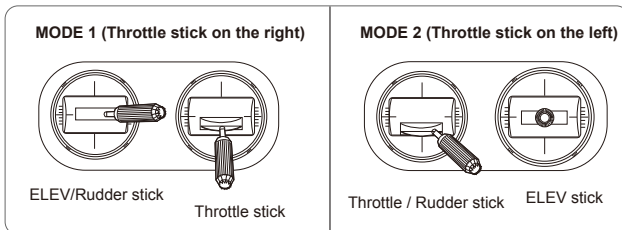


9.0 Operation Instruction


The aircraft roll forward




The aircraft roll backward



The aircraft roll left




The aircraft roll right



FLIP & ROLL'S

Are only available in the intermediate & Advanced flight mode.
Set MIX switch to position 1 or 2, to select the appropriate flight mode.

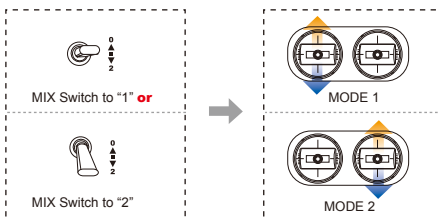


Attention:

- 1) Always select large open spaces with soft ground for flying.
- 2) Rolls and flips are best suited for experienced pilots.
- 3) Match throttle power to the flight to manage altitude.

FLIP & ROLL'S


Are only available in the intermediate & Advanced flight mode.
Set MIX switch to position 1 or 2, to select the appropriate flight mode.

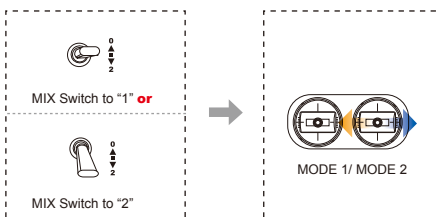

Attention:

- 1) Always select large open spaces with soft ground for flying.
- 2) Rolls and flips are best suited for experienced pilots.
- 3) Match throttle power to the flight to manage altitude.

DERAM Baron AKA Proximity FPV obstacle flying

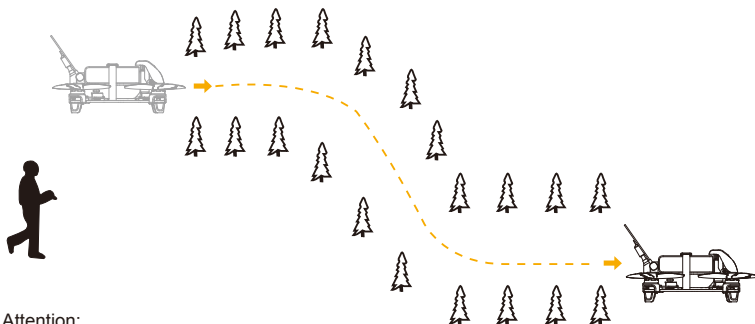

Attention:

- 1) Dream Baron is more suitable for experienced pilots, highspeed obstacle avoidance flights require advanced skills.
 - 2) Recommended FPV range 300m depending on environment.
 - 3) Avoid flying over people, animals, do not fly over crowds, concerts or sports stadiums.
Avoid flying close to powerlines and cellphone towers as these may crash you.
Visit walkera.com for more suggestions and for WALKERA racing gates.
-


10.0 End flight

- ① Land the aircraft, disarm(lock) the aircraft.
- ② First Power off the aircraft by unplugging the battery, then turn off the radio.
- ③ Finally, remove the battery from the aircraft.

11.0 Additional remark

11.1 DEVO 7 Remote Controller Setting

Boot Screen(Main interface)

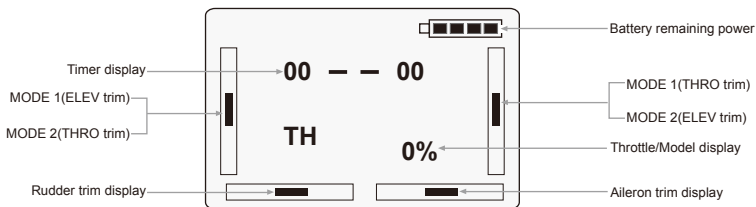


Model Select(SELEC)




Press UP or DN to select "MOD 1", press ENT to confirm and then press EXT to return to MODEL.

Model Name(NAME)

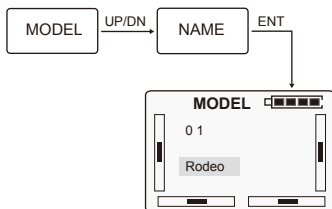


Press R or L button to change the character and figure, named model as Rodeo. Press ENT to confirm and then press EXT to return to MODEL.

Type Select(TYPE)

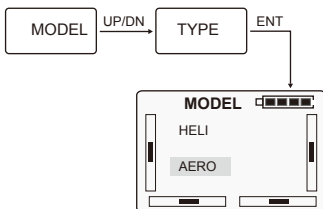


Press UP or DN to select AERO, Press ENT to confirm and then press EXT to return to MODEL.

Wing Type(WING)

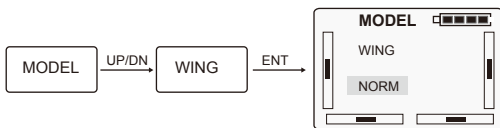


Press R or L to select NORM, Press ENT to confirm and then press EXT to return to MODEL.

Device Output(OUTPUT)

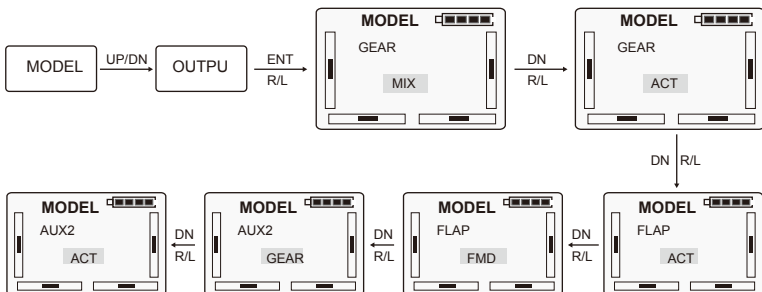

After setup, press ENT to confirm and then press EXT to return to Main interface.

Reverse Switch(REVSW)

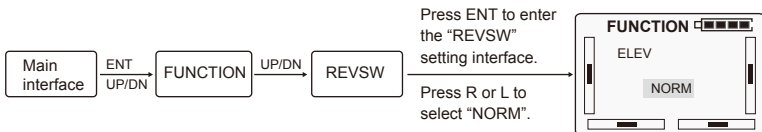

ELEV	AILE	THRO	RUDD	GEAR	FLAP	AUX2
NORM	NORM	NORM	NORM	NORM	NORM	NORM

After settings, press ENT to confirm and then press EXT to return to Main interface.

11.2 TX5836/TX5837 Video transmitting channel selection

There are 8 channels available, chose the best channel based on the image quality on your screen. Select the channel by adjusting the dip-switches on the video-transmitter according to the diagram.


Channel	1	2	3	4	5	6	7	8
Frequency	5866MHz(CE) 5847MHz(FCC)	5847MHz	5828MHz	5809MHz	5790MHz	5771MHz	5752MHz	5733MHz
Code position (on/off)								



Attention:

- Video transmitter channel must match the receiver channel.

11.3 Brushless ESC and Brushless Motor connection diagram

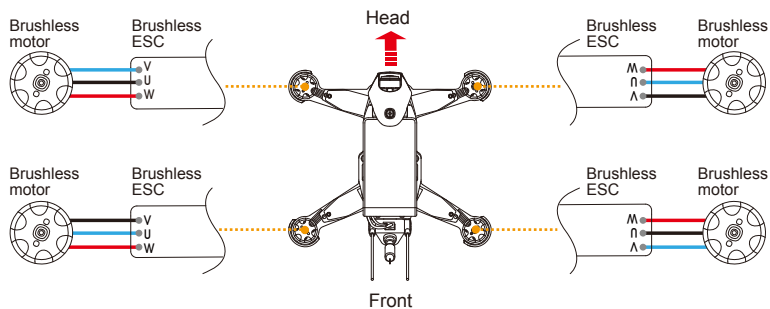


Attention:

- The red, blue and black wires of the brushless motors must be soldering to the brushless ESC according to the illustration.

12.0 In the Box / List of Articles

Check all the following items in your package. If any of them is missing, please contact walkera or your local dealer.

Aircraft Body x1




Remote Controller x1




Charger x1



Propellers (Pair) x2




Aircraft Battery x1



Training cable x1



Micro-USB Cable x1



Manuals

«QUICK START GUIDE»




Manual of DEVO 7(DVD)



Tips:

- Rodeo 110 BNF Package: no remote controller, Training Cable, Manual of DEVO 7(DVD)



 Tel: 400-9318-878

User manual is subject to change without prior notice.

Please go to Walkera official website to get the latest version.

